


Choice of Dynabolts or Wood Screws

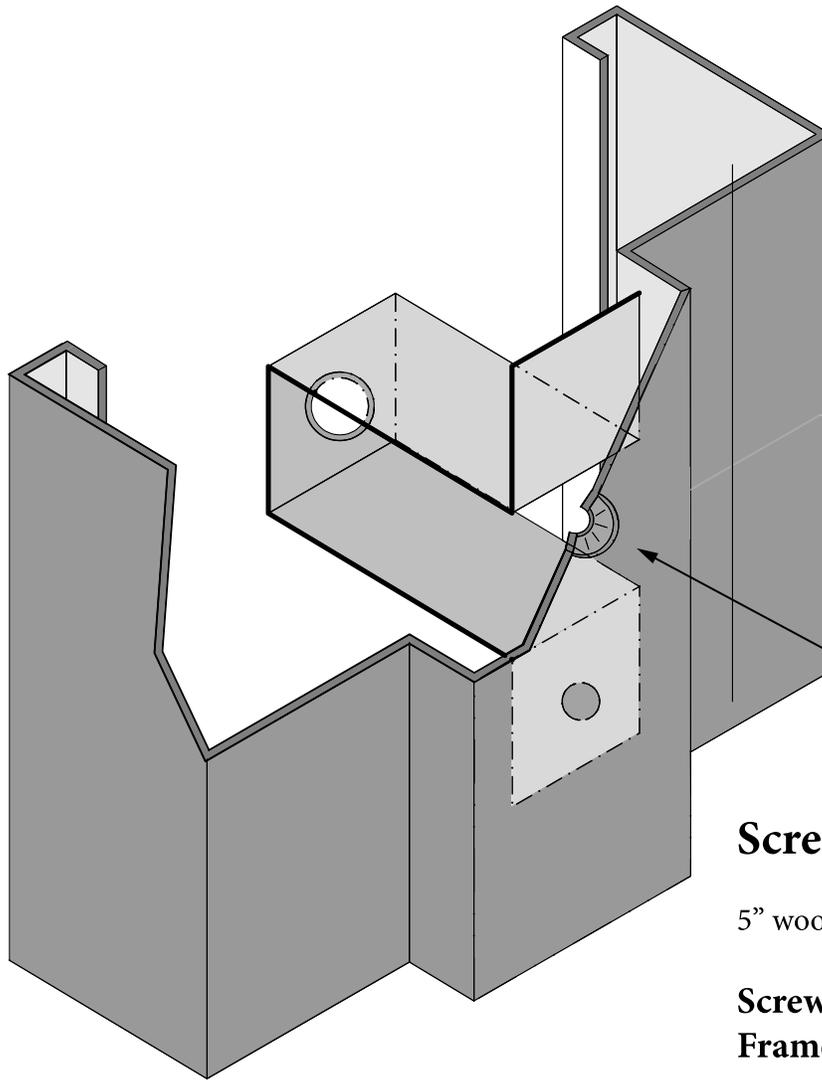

Bolt Requirements:


5" x 3/8" Dynabolt with head diameter of .722

Frame countersunk to receive flat head of bolt or wood screw


Screw Requirements:

5" wood lag screws.


Screws are supplied by J/R Metal Frames as necessary.

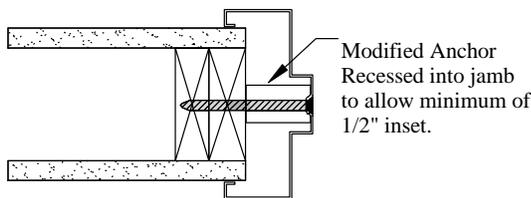

Wrap Wall

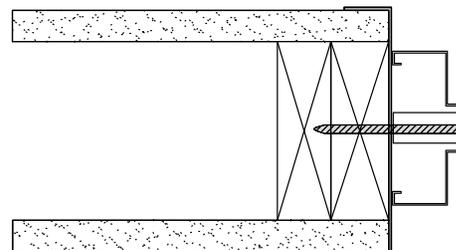

Butt to metal or vinyl cap

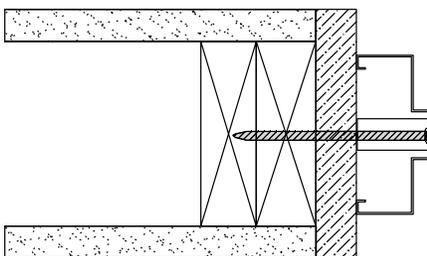

Butt up to wood cap

 <p>MANUFACTURERS OF STANDARD AND CUSTOM HOLLOW METAL FRAMES AND DOORS 287 Oakland Road, Belgrade, Maine 04917 USA Office 207-465-9066 Fax: 207-465-9452</p>			
QUALITY SINCE 1981		Title: Existing Wall Anchor (EWA)	
Original Date:	Revision:	Revision Date:	Drawing Number:
05-08-07			FD0004
Drawn By:	Scale:	Sheet:	of
	Drawing not to scale		