

Smallest jamb depth available for a HC elevator shaft frame is 3 1/2" (2 1/2" Wall Dimension).


Largest jamb depth available for a HC elevator shaft frame is 52 7/8" (51 7/8" Wall Dimension).

Smallest face dimension available on the low side of a HC elevator shaft frame is 5/8".

Door stop is a 1 1/2" wide x 1/8" thick steel plate plug welded every 12" on center to jamb on the shaft side face.

HC elevator shaft frames are not available with a fire rating.

HC elevator shaft frames are available welded only.

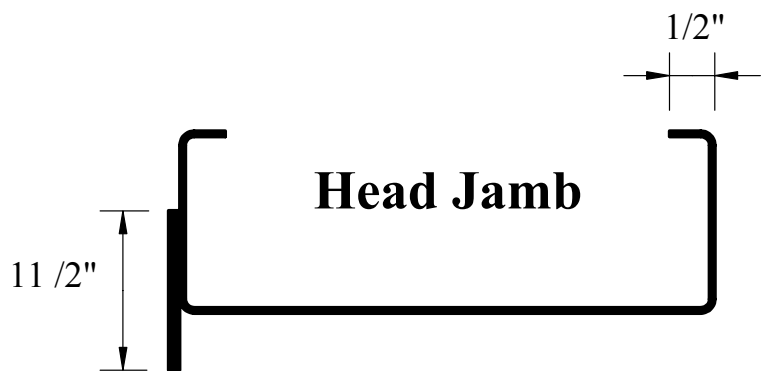

Face dimensions shown on drawing are typical dimensions to be provided unless otherwise specified by customer on a HC elevator shaft frame.

<small>MANUFACTURERS OF STANDARD AND CUSTOM HOLLOW METAL FRAMES AND DOORS</small>			
<small>287 Oakland Road, Belgrade, Maine 04917 USA Office 207-465-9066 Fax: 207-465-9452</small>			
QUALITY SINCE 1981	Title: Handicap Elevator Shaft Frame		
	<small>Revision:</small>	<small>Revision Date:</small>	<small>Drawing Number:</small>
<small>Original Date:</small>	04-25-07		PR0006
<small>Drawn By:</small>	<small>Scale:</small> Do not scale this drawing	<small>Sheet:</small> 22 of 55	