

Smallest jamb depth available for a pocket door frame is 4 1/2" (3 1/2" Wall Dimension).

Largest jamb depth available for a pocket door frame is 52 7/8" (51 7/8" Wall Dimension).


Smallest jamb & head face dimension available on a pocket frame is 1".

Largest jamb & head face dimension available on pocket door frames is 52 7/8". Any combination of head and jamb face dimension is acceptable.

Pocket door frames are not available with a fire rating.

14 Gauge frames do not have 5/16" drywall returns.

Pocket door frames are available welded only.

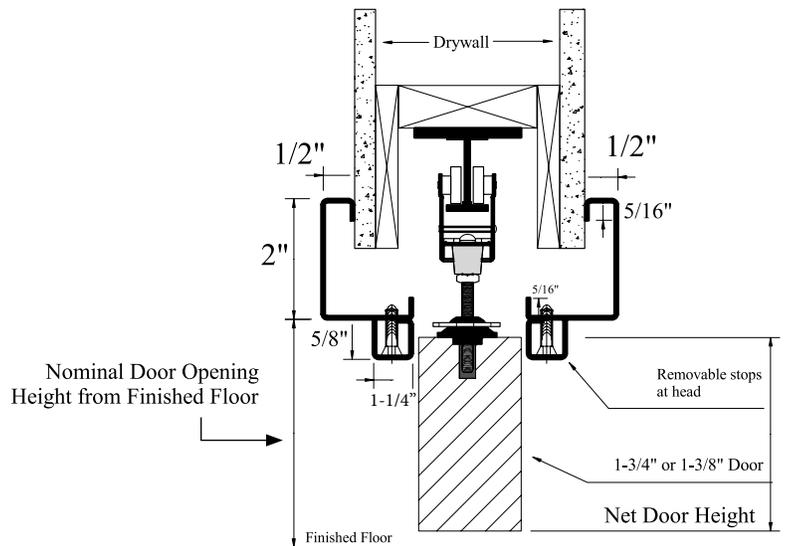

## Verify Hardware Set Adaptability

*Refer to Pocket Door Hardware Set instructions for proper sequencing of HM pocket door frame installation and wall construction.*

*Drawing shown using L.E. Johnson Hardware 2000 Series Heavy Duty Pocket Door Frame Set.*

*Pocket Door Hardware Set; track, hardware & wall reinforcement studs to be provided by others.*

MANUFACTURERS OF STANDARD AND CUSTOM HOLLOW METAL FRAMES AND DOORS 287 Oakland Road, Belgrade, Maine 04917 USA Office 207-465-9066 Fax: 207-465-9452			
<b>QUALITY SINCE 1981</b>	Title: <b>Pocket Door Frame</b>		
Original Date: 01-19-07	Revision: <b>#1</b>	Revision Date: <b>02-23-17</b>	Drawing Number: <b>PR0007</b>
Drawn By:	Scale: <b>Do not scale this drawing</b>	Sheet: <b>of</b>	